

# TARALAY IMPRESSION & UNI

gerflor.com



**Gerflor**<sup>®</sup>  
theflooringgroup







# TARALAY IMPRESSION




0373 - Noma Ice




0723 - Charme Pecan




0719 - Infinity Lichen



0068 - Renzo Pecan



0025 - Renzo Taupe



0726 - Sycamore Dark





16.6 cm

**0519 - Noma Beige**



16.6 cm

No strip  
Continuous  
design

**0680 - Infinity Greige**



16.6 cm

No strip  
Continuous  
design

**0725 - Sycamore Light Brown**



16.6 cm

**0773 - Portobello**



16.6 cm

11.2 cm  
14.2 cm  
8.7 cm  
6.4 cm

**0734 - Loft Chestnut**



16.6 cm

**0371 - Noma Rustic**



10 cm

**1314 - Walnut brown**

# TARALAY IMPRESSION



0538 - Habana Vinales



0722 - Herringbone Blond



0522 - Habana Trinidad



0724 - Herringbone Chatain



0721 - Charme Natural






0528 - Walnut Cream




0720 - Infinity Aube



0727 - Sycamore Vanilla



0760 - Moon Island



0671 - Loft Light Brown



# TARALAY IMPRESSION & UNI



**0769 - Mohair White**



**0523 - Cemento Genova**



**0543 - Cemento Brescia**



**0767 - Mohair Natural**



**0524 - Cemento Capri**



**0766 - Mohair Dark**



**0525 - Cemento Modena**




**0770 - Gentlemen Clear**



**0771 - Gentlemen Grey**




**0772 - Gentlemen Coffee**

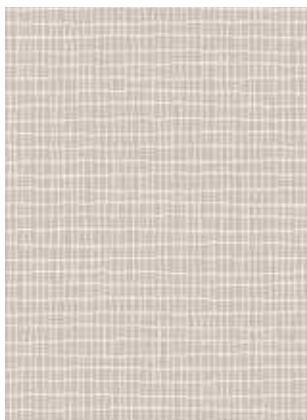


**0774 - Trame Clear**



**0776 - Trame Beige**

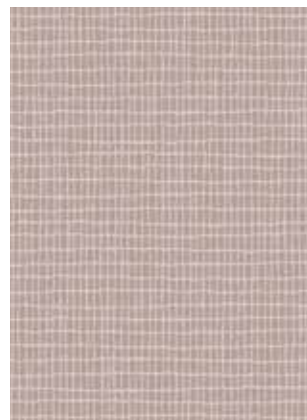

**0777 - Trame Rose**

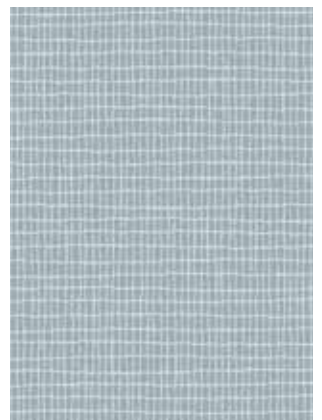


**0775 - Trame Blue**







**0730 - Corner** Light Beige

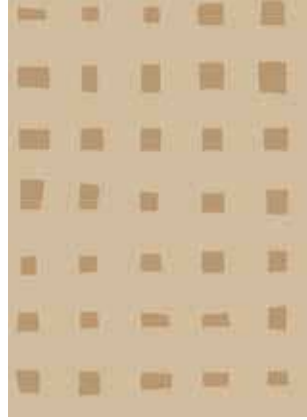

**0756 - Kubes** Beige




**6267 - Uni** Beige

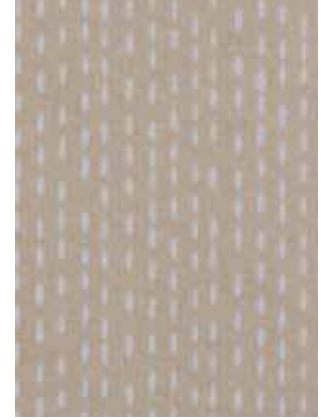


**0736 - Rice** Champagne



**0728 - Corner** Offwhite



**6273 - Uni** White

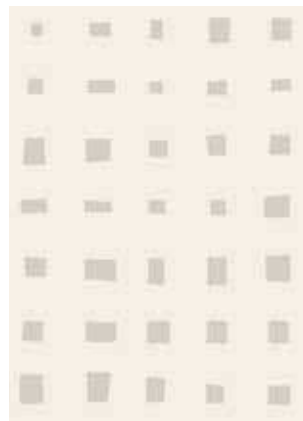

**0755 - Kubes** White




**0763 - Rice** Greige



**0745 - Nest** Metal



**0737 - Rice** Souris




**6271 - Uni** Grey




**0729 - Corner** Metal



**0753 - Kubes** Grey

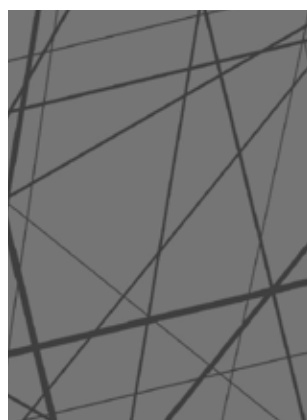

**0746 - Nest** Black



**0778 - Uni** Anthracite




**0744 - Stars** Anthracite


# TARALAY IMPRESSION & UNI




**0762 - Rice Brown**



**6265 - Uni Brown**

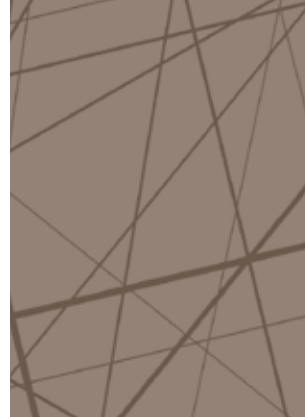


**0765 - Nest Taupe**

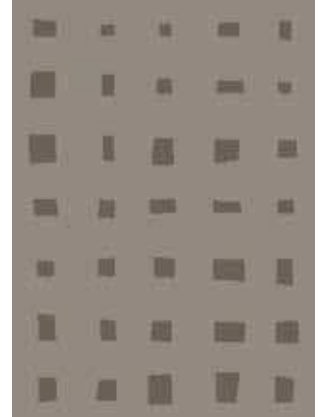


**0751 - Kubes Taupe**



**0741 - Corner Tomette**



**6270 - Uni Tomette**

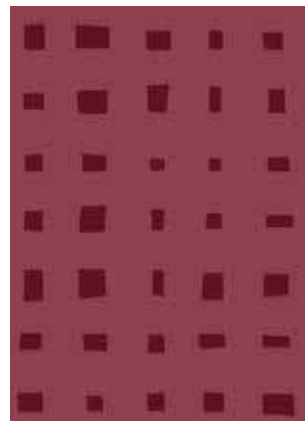

**0748 - Kubes Burgundy**



**0757 - Rice Coquelicot**



**0738 - Rice Copper**




**0733 - Corner Copper**




**0752 - Kubes Gold**



**0759 - Rice Mustard**



**6268 - Uni Sun**

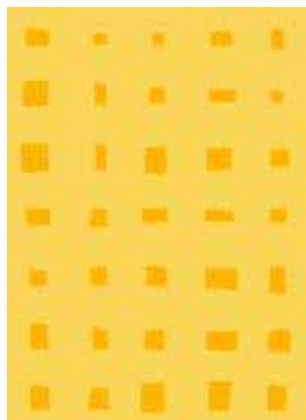

**0750 - Kubes Sun**



**6269 - Uni Orange**



**0764 - Stars Orange**






**0739 - Corner Anis**



**6263 - Uni Anis**



**0735 - Rice Light Green**



**6262 - Uni Turquoise**



**0740 - Corner Turquoise**




**0747 - Kubes Olive**



**6264 - Uni Olive**



**0758 - Rice Sea**

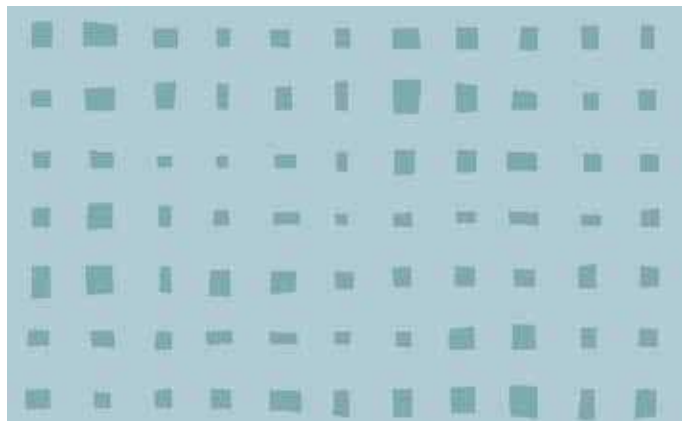


**0749 - Kubes Sky**



**0743 - Stars Baltique**



**0754 - Kubes Blue**



**6261 - Uni Blue**



**0732 - Corner Dark Blue**



**6260 - Uni Dark Blue**

TARALAY IMPRESSION		TARALAY UNI
COMPACT	COMFORT	COMFORT
Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Uni

## DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35	3.00
	ASTM F386-02	inch	0.08	0.13	0.1
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	0.70	0.65	0.65
	ASTM F410-02	inch	0.028	0.026	0.026
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825	2300
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25	200 / 25
	-	feet - inch	6'6" / 82'	6'6" / 82'	6'6" / 82'

## CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651	EN 651
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet: ramp test with oil <sup>(1)</sup>	DIN 51 130	class	R10	R10	R10

## PERFORMANCES

Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	Type	I	-	-
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08	≈ 0.11
Impact sound insulation	EN ISO 717-2	dB	8	19	17
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	ProtecSol® 2	ProtecSol® 2	ProtecSol®
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) <sup>(2)</sup>	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth

## ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m <sup>3</sup>	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®

## CE marking

CE	EN 14041	-			
		-			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges  
 (2) The implementation of an effective cleaning regime is the best defence against infection

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for **TARALAY IMPRESSION COMPACT and COMFORT PLUS** (0.9mm wearlayer) available in the Taralay Impression & Uni product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

**IMPORTANT:** The information contained in this document is valid from 01/04/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

## TARALAY IMPRESSION & UNI, LESS SPEAKING FOR MORE ACTIONS

<p><b>COMPOSITION</b> 100% REACH compliant</p>	<p><b>RECYCLABILITY</b> 100%</p>	<p><b>INDOOR AIR QUALITY</b> 100 times lower than norm requirements (TVOC &lt; 10 µg/m<sup>3</sup> after 28 days)</p>	<p><b>LCA</b> Eco-designed according to a product-specific life cycle analysis</p>	<p><b>WELLNESS</b> Anti slip R10 Comfort version: Walking comfort &lt; 65 dB (best certification) and impact sound insulation - 19 dB</p>
--	--------------------------------------	---	--	---

Be CONNECTED!

www.gerflor.com