



ALL TARALAY BENEFITS ... WITH FAST TRACK INSTALLATION



Direct installation on existing or uneven subfloors

At Gerflor, we believe that contract jobsites will be more and more **under time pressure....**

Gerflor has always been **pioneer in providing adhesive free looselay solutions**, such as Textile backing rolls,
LVT Clic, GTI, ...

We think these solutions are the present and future of flooring because they are faster and cheaper for installation, great to live in for years and healthier for the planet.

Made in France, Taralay Libertex is a new generation of **textile backing roll, specifically developed for commercial applications**.

It enables installers to save **time and money** while offering to their customers all the benefits of Taralay!







Not shutdown, no odor

No dry time... it's done!

Great to live in

TARALAY LIBERTEX

FASTER & CHEAPER FOR INSTALLATION

MINIMAL SUBFLOOR PREPARATION









Renovation on ceramic, joint < 5 mm wide, 1mm deep

FAST AND EASY INSTALLATION



LOOSELAY INSTALLATION: DOUBLE-SIDED ADHESIVE TAPE

- On room edges & at seam
- In corridor, every 10 m



COMPATIBLE WITH ASBESTOS SUPPORT



NO ADHESIVE

- Installation in occupied room
- Minimum facility downtime
- Better air quality
- Easier and cheaper installation



EASIER TO REMOVE AND RECYCLE

NO SHUTDOWN


NO DRY TIME





SAVE TIME, SAVE MONEY

SAVE UP TO 30% IN INSTALLATION COST FOR NEW BUILDS & RENOVATIONS

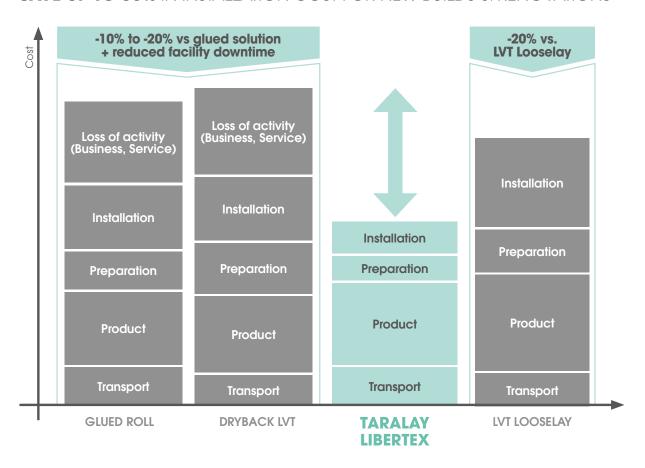

TARALAY LIBERTEX

GREAT TO LIVE IN... FOR YEARS & YEARS

MAX 3

INNOVATIVE 3-LAYER SYSTEM


- 1 Compact foam with fiber glass veil
 - 2 Acoustic foam
- 3 Recycled polyester reinforced backing

DURABLE & RESISTANT TO HIGH TRAFFIC







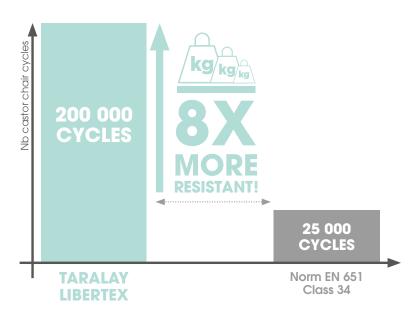


HYGIENIC & EASY TO MAINTAIN





ACOUSTIC & COMFORTABLE

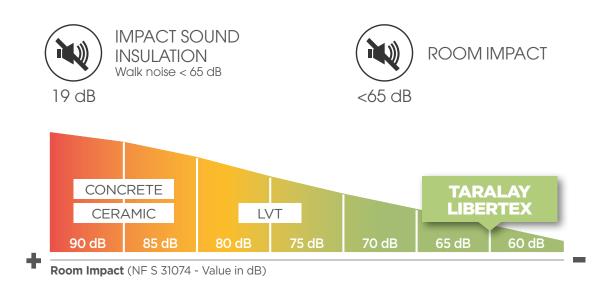

AESTETIC







TARALAY LIBERTEX HEALTHIER LIVING



ECO CONCEPTION



 Polyester backing with recycled PET bottles







Adhesive free installationDurable


RECYCLE BETTER



• 100% Recyclable

INDOOR AIR QUALITY

10 times better than norms requirements (TVOC <100 microgram/m³ after 28 days) Free of formaldehyde

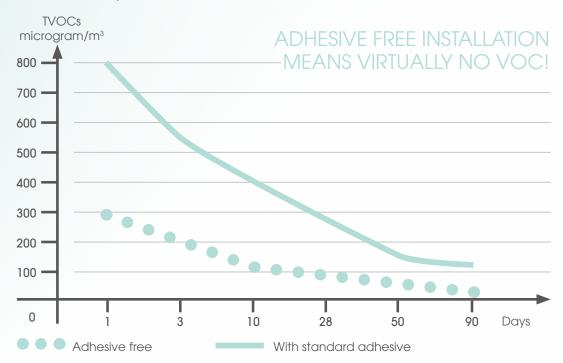

HYGIENIC


TARALAY LIBERTEX is hygienic by design.

- With vinyl rolls, no hassle of cleaning joints, bevels or grout.
- Gerflor Protecsol® surface treatment makes manual or mechanical maintenance easy and efficient.
- Accessories such as coving or Gerflor Clean Corner system can help further facilitate cleaning procedures.



TARALAY LIBERTEX 20 ULTRA REALISTIC DESIGNS


ULTRA MAT SURFACE _____

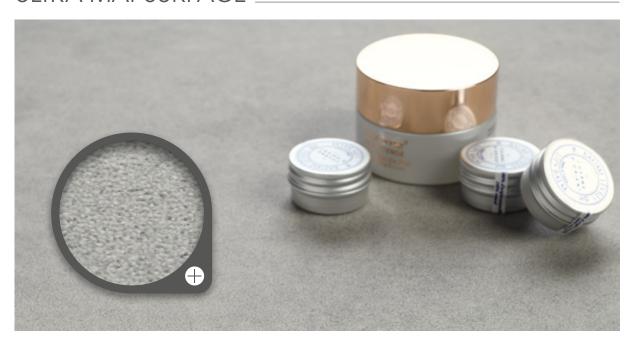

REALISTIC EMBOSS - Mineral, Wood _____



MIX & MATCH

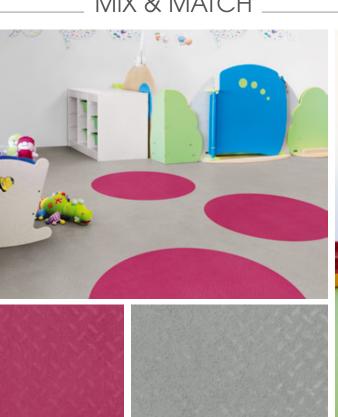







TARALAY LIBERTEX ALL IN ONE SOLUTION







HOT WELDING

for 100% watertight hygienic system (ref CR40 0585)



COLD WELDING

for invisible joint (see Romus #95605)



WALL TRANSITION

- Vynaflex skirtings, ideal for commercial applications H 60mm - ref 0483 H 80mm - ref 0482 H100mm - ref 0477
- Coving for 100% watertight hygienic system
- Clean Corner System





ENTRANCE MATS

A new quick & easy installation of entrance mats with Quickmat Tile (ref 1725)

More info on accessories: www.gerflor.com

TARALAY LIBERTEX

A SOLUTION FOR EVERY MARKET APPLIC








ATION




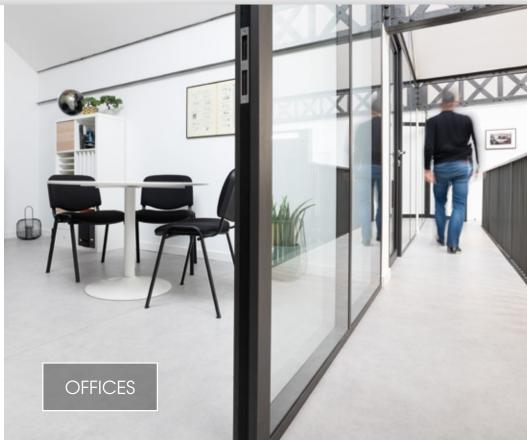





AMSTERDAM

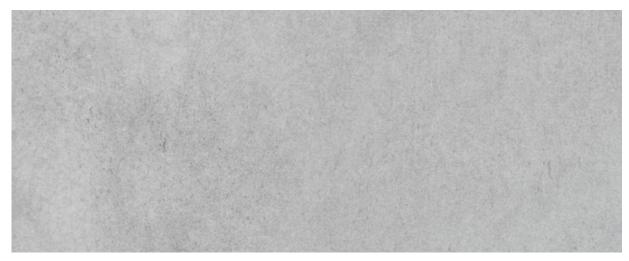

2151 - Amsterdam Light Grey

NCS: S-2500N / LRV: 39



2152 - Amsterdam Grey

NCS: S4502-Y / LRV: 26



2153 - Amsterdam Anthracite


NCS: S6502-Y / LRV: 12



COCOON



2241 - Cocoon Silver Brown NCS: 4502-R / LRV: 34

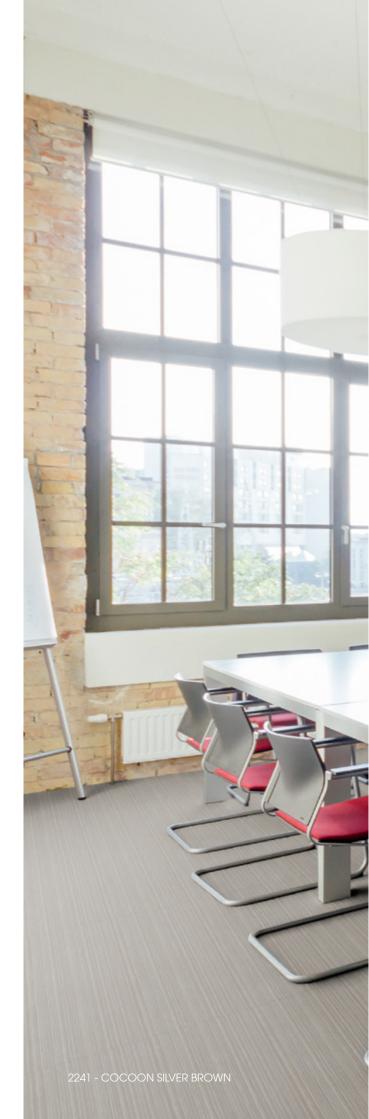

HOSSEGOR



2247 - Hossegor Latte NCS: 3005-Y80R / LRV: 38



LEGEND



2243 - Legend Chestnut

NCS: S3010-Y30R / LRV: 31



2242 - Legend Country

NCS: S4020-Y20R / LRV: 26



1430 - Legend Grey

NCS: S5502-R / LRV: 18



PAROS



2248 - Paros Clear NCS: S2502-Y / LRV: 43





PURE OAK



0720 - Pure Oak Clear NCS: S2010-Y40R / LRV: 31



1751 - Pure Oak Grey NCS: S3500N / LRV: 20



REFLECT



Reflect: reverse lay



SKANDI OAK



2246 - Skandi Oak Toffee



2245 - Skandi Oak Natural



2244 - Skandi Oak Clear

NCS: S2005-Y50R / LRV: 43



TARALAY LIBERTEX

TARALAY LIBERTEX is ideal for fast track installation or renovations in commercial buildings.

It is a multi-layered vinyl floorcovering with a printed design protected by a 0,70 mm thick transparent wear layer. The product features a high density foam complexed with fiber glass, an acoustic foam layer and a reinforced textile backing. It offers **19 dB sound insulation**. It is available in 2m and 4m wide sheet, offers a R10 slip resistance and a group T wear rating. It is mechanically embossed, benefits from Protecsol® surface treatment and has an ultra matt look.

TARALAY LIBERTEX is a worry-free looselay solution. It is laid without glue, simply applying a double-sided tape such as Fix&Free on room edge and at the joint. Its textile backing absorbs surface irregularities requiring minimal subfloor preparation on uneven floors. It is compatible with cold welding, hot welding, coving, and Vynaflex skirtings.

It includes at least 30% mineral materials and 20% renewable materials. Textile backing is made at 95% from recycled PET bottles. It is 100% recyclable and 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000) are below 100 microgram / m³. It is classified A + (the best class) for indoor air quality.

			TARALAY LIBERTEX
			TANALAI LIDENILA
DESCRIPTION			
Total thickness	EN ISO 24346	mm	3.65
Wearlayer thickness	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/m²	2900
Width of sheet	EN ISO 24341	cm	200 / 400
Length of sheet	EN ISO 24341	lm	20
CLASSIFICATION			
Norm/product specification	-	-	EN 651
European classification	EN ISO 10874	class	34
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	-	R10
PERFORMANCES			
Wear resistance	EN 660.2	mm^3	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	Protecsol®
Chemical products resistance ^[1]	EN ISO 26987	-	OK
ENVIRONMENT / INDOOR QUALIT	ΓY AIR		
TVOC after 28 days	ISO 16000-6	μg/m³	< 100
Certification	-	-	Floorscore®
CE MARKING			
(€	EN 14041		

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.











Be connected!











#Gerflor



TARALAY LIBERTEX: AN ECO-RESPONSIBLE CHOICE



COMPOSITION 100% REACH



RECYCLED CONTENT Backing made with recycled PET



RECYCLABILITY 100%



INDOOR
AIR QUALITY
10 times better than
norms requirements
(TVOC <100 microgram/m³
after 28 days)
Free of formaldehyde



INSTALLATION No adhesive



WELLNESS

• COMFORT
Impact noise reduction:
-19dB

• SECURITY
Anti slip performance
R10

